

TRANSCO

Powering the World is Our Profession

Never Have the Correct Size Transformer on the Service Truck? Not Anymore!







UTX SERVICE PRO™ TRANSFORMERS

2 Models Replace 8 Secondary Volt Ratings.

True 30mA Output - The UTX Service Pro Transformer can replace 8 secondary volt ratings.

Diagnostic Circuit - "LED" indicates the reason for service, allowing for quick and easy troubleshooting.

Service Button - For easy troubleshooting of ground faults and primary wiring problems. Overrides the SGFP for up to 30 minutes.

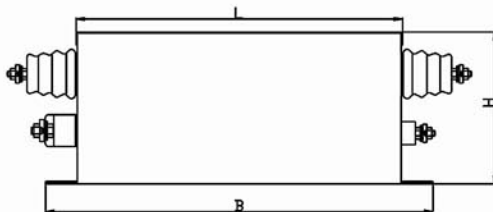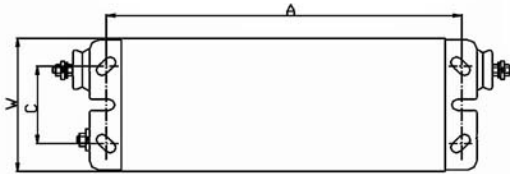

VanguardGFP™
UTX SERVICE PRO TRANSFORMERS

CASE DIMENSIONS AND SPECIFICATIONS

UTX Service Pro Transformer	REPLACES	L	W	H	A	B	C
UTX1512N3GO / UTX1527N3GO	15000v, 12000v, 10500v	9.14"	4.21"	5.35"	10.13"	11.25"	3.00"
UTX912N3GO / UTX927N3GO	9000v, 7500v, 6000v, 5000v, 4000v, 3000v, 2000v	7.32"	3.30"	4.88"	9.00"	10.00"	2.00"

Transco, Inc.

www.transco-neon.com email: transco@earthlink.net